


HDBaseT Extender Set with Wall-Plate Transmitter

Connection Diagram

1. Connect a source such as a Blu-Ray player, game console, A/V receiver, cable or satellite receiver, etc. to the HDMI input on the transmitting unit.
2. Connect a display such as an HDTV or HD projector to the HDMI output on the receiving unit.
3. Connect a single Cat5e/6 cable to the "HDBaseT OUT" connector of the transmitting unit, and then to the "HDBaseT INPUT" connector of the receiving unit.
4. For power, plug in the transmitting or receiving unit with included DC 24V 1A power supply.
5. Power on each device in the same sequence - transmitter and receiver will already be powered when either unit is plugged in.

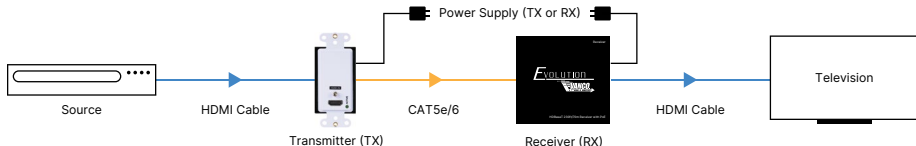

At this point the display connected should display the source signal connected to the extender set. If no signal is being displayed, check cables and connections.

Technical Support

Please read the product manual prior to calling or installing this unit since it will familiarize you with the capabilities of this product and its proper installation.

In case of problems, please contact Vanco Technical Support by dialing 1-800-626-6445. You can also email technical support issues to techsupport@vanco1.com. When calling, please have the part number, serial number (affixed to the bottom of the unit), and invoice available for reference during the call.

All active electronic products are 100% inspected and tested to ensure highest product quality and trouble-free installation and operation. The testing process utilizes the types of high-definition sources and displays typically installed for entertainment and home theater applications.

Vanco Tech Support

Phone: 1-800-626-6445

Email: techsupport@vanco1.com

Web: www.vanco1.com

Please have the part number, serial number, and invoice available when requesting support.

Download the Product Manual

For additional support and the product manual, scan the QR code or visit www.vanco1.com.

