


ARC DIGITAL AUDIO EXTENDER

PAEXARC1 SPEC SHEET




PULSEAUDIO™
A Vanco Brand

Transmitter Unit

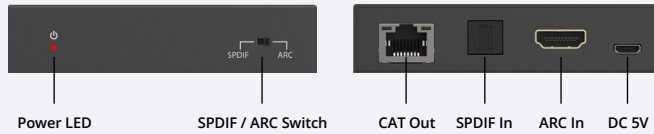

Receiver Unit

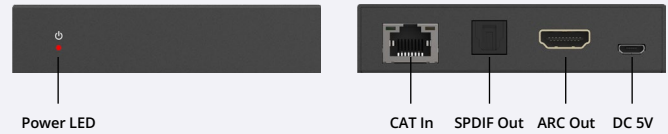

Audio	
Supported Audio Formats	PCM 2CH, Dolby/DTS 5.1CH
Sample Rates	
Optical / ARC (492ft / 150m)	32kHz, 44.1kHz, 48kHz, 88.2kHz, 96kHz
ARC (295ft / 90m)	32kHz, 44.1kHz, 48kHz, 88.2kHz, 96kHz, 176.4kHz, 192kHz
Connections	
Transmitter	Input: (1) SPDIF, (1) ARC HDMI® In, (1) Micro-USB (Power)
	Output: (1) CAT Out (Cat5e/6)
Receiver	Input: (1) CAT In (Cat5e/6), (1) Micro-USB (Power)
	Output: (1) SPDIF Out, (1) ARC HDMI® Out
Technical & Mechanical	
Housing	Metal
Color	Black
Dimensions	3.5" x 2.8" x 0.8" (90mm x 72mm x 20mm)
Weight	6.2oz / 175g
Power	
Power Consumption	Transmitter: .35W
	Receiver: .7W
ESD	Human-body Model: ±8kV (Air-gap discharge)
	±4kV (Contact discharge)
Operating Environment	
Temperature	Working: 0°C to 40°C / 32°F to 104°F
	Storage: -20 to 60°C / -4°F to 140°F
Relative Humidity	20 to 90% RH (Non-condensing)

Please refer to the [manual](#) for detailed operation instructions and connection diagrams.

Visit us online to learn more and find a local distributor.

©2023 Vanco International, LLC • Batavia, IL 60510 USA • www.vanco1.com

Brands Made for AV Integration