


Wireless Audio Extender

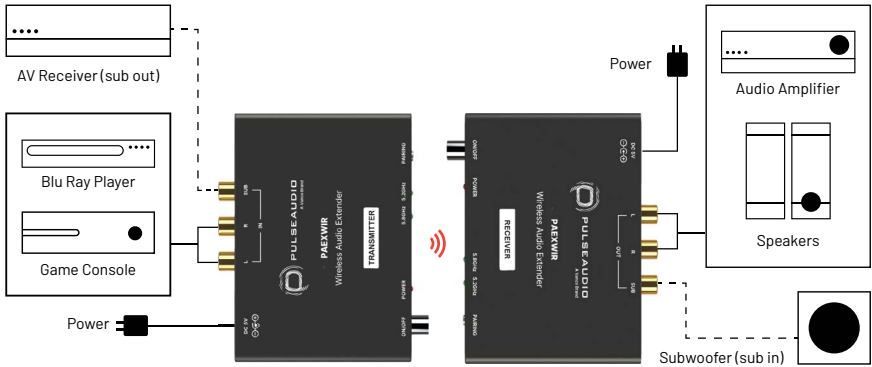

1. Connect the Transmitter to an analog audio source and/or subwoofer output
2. Connect the Receiver to an analog audio device such as an amplifier, speaker, or subwoofer
3. Connect both power supplies to the TRANSMITTER and RECEIVER using the provided power supplies, with the TRANSMITTER first, followed by the RECEIVER.

NOTE: The transmitter and receiver should be paired automatically out of the box using 5.8GHz by default.

Pairing

The PAEXWIR is paired at the factory for easy plug and play functionality. In the event the units become unpaired, perform the following procedure:

1. Short press the Pairing Button on the transmitter and receiver to toggle between 5.8GHz (blue LED) and 5.2GHz (green LED).
2. Ensure the transmitter and receiver show the same color is selected.
3. Long press the Pairing Button for 3 seconds on both units to enter into pairing mode. The 5.8G or 5.2G LEDs will blink quickly once in pairing mode.

NOTE: Pairing mode period lasts 20 seconds in case both units are not side by side and buttons are not able to be pushed simultaneously. After 20 seconds, the Pairing Button will need to be pressed and held again to enter pairing mode.

Successful pairing is indicated by a solid Blue or Green (depending on which GHz signal is selected) LED on both the transmitter and receiver.

Vanco Tech Support

Phone: 1-800-626-6445

Email: techsupport@vanco1.com

Web: www.vanco1.com/tech-support



Product Manual

Please have the part number, serial number, and invoice available when requesting support.