




Cisco Configuration

The EVO-IP HDMI over IP System has been tested and confirmed to work with the Cisco SG300/500 and newer SG350/550 ethernet switches. Below are screenshots (used with SG350-28P) showing the configuration needed to get the system up and running. Please refer to the Cisco manual and instructions on how to access the settings.

1. Enable **IGMP Snooping** by going to: **Multicast->IPv4 Multicast Configuration->IGMP Snooping**. Enable the **IGMP Snooping Status** and **IGMP Querier Status** then click **Apply**.

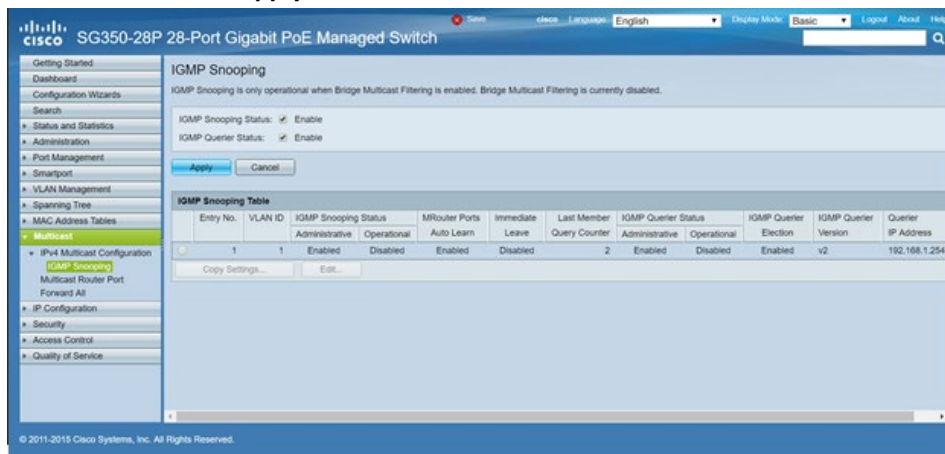

2. Enable **Jumbo Frames** by going to **Port Management->Port Settings**. Click on the checkbox to **Enable Jumbo Frames**, then click **Apply**.

